





ing. brizio basi & c.

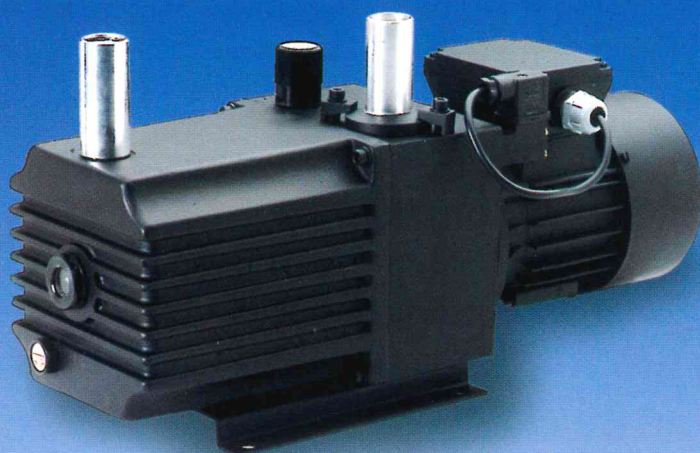

BHD10

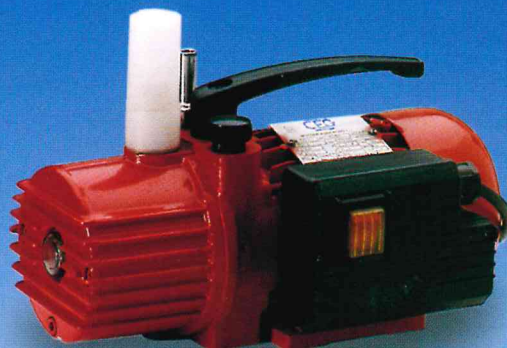

BSV2



BSV4 - BSV8 - BS4/2 - BSV4/2

**POMPE PER VUOTO ROTATIVE
LUBRIFICATE SERIE BS / BHD**

**OIL ROTARY VACUUM PUMPS
BS / BHD SERIES**

DATI TECNICI / TECHNICAL DATA

Modello Model	N° Stadi N° Stages	Portata nominale (m ³ h ⁻¹) Nominal pumping speed	Pressione residua (mbar) Ultimate pressure	Potenza installata (KW) Motor power	Giri motore (giri/l') Revolution speed (rpm)	Carica olio (litri) Oil charge (litres)	Peso (Kg) Weight (Kgs)
BSV 2	1	2	0,05	0,11	2900	0,20	6,8
BS 4	1	4	0,5	0,18	1450	0,35	10,8
BSV 4	1	4	0,05	0,18	1450	0,45	11
BSV 8	1	8	0,05	0,37	1450	0,50	14,3
BS 4/2	2	4	0,02	0,25	1450	0,40	13,5
BSV 4/2	2	4	0,005	0,25	1450	0,40	13,8
BHD 7	2	7	> 0,001	0,25	1450	1,25	32
BHD 10	2	10	> 0,001	0,37	1450	0,80	20
BHD 14	2	14	> 0,001	0,37	1450	1,75	36

Serie BS: esecuzione standard con motore elettrico monofase 220V, 50 Hz. e valvola di ritegno meccanica
 BS Series: standard execution fitted with 220V, 50 Hz. single-phase electric motor and mechanical non return valve

Serie BHD: esecuzione standard con motore elettrico trifase 220 / 380 V, 50 Hz. e valvola di ritegno elettromeccanica
 BDH Series: standard execution fitted with 220 / 380 V, 50 Hz. three-phase electric motor and electro-mechanical non return valve

Caratteristiche


Versatilità e silenziosità
 Rendimento costante nel tempo
 Ridotta manutenzione
 Raffreddamento ad aria
 Servizio continuo 24 ore su 24
 Realizzazione compatta monoblocco
 Trasmissione diretta
 Valvola di ritegno aria / olio in aspirazione
 Zavorratore d'aria (escluso mod. BS4)
 Possibilità di motore monofase o trifase
 Esecuzioni con motore a tensione / frequenza differenti
 Vasta gamma di accessori

Features


Versatility and low noise
 Costant performance in time
 Reduced maintenance
 Air cooling
 Continuous service
 Compact design
 Direct drive
 Non return air / oil valve
 Gas ballast (excepted model BS 4)
 Three phase or single phase electric motor
 Others supply with different voltages and frequencies
 Wide range of accessories

Dimensioni mm / Dimensions mm

	BSV2	BS4	BSV4	BSV8	BS4/2	BSV4/2
A	270	322	345	390	345	345
B	165	156	156	156	156	156
C	187	258	258	258	258	258
V	Portagomma liscio diametro esterno 11 mm. (standard) A richiesta: diam. esterno 8 o 14 mm, filetti SAE o GAS ecc. Nozzle external diameter 11 mm. (standard) On request: external diameter 8 or 14 mm, SAE or GAS treated etc.					

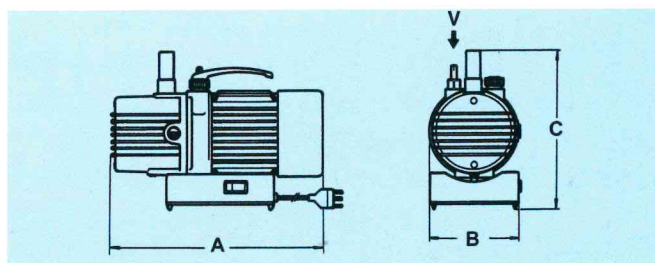

	BHD7	BHD10	BHD14
A	480	480	560
B	230	180	230
C	300	250	300
V	Portagomma liscio DN25 A richiesta: Pneurop KF25 DN 25 Nozzle On request: Pneurop KF25		

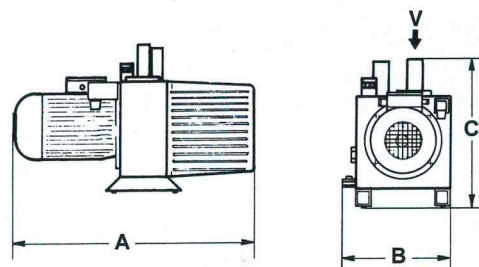

Ing. brizio basi & c.

Italy - 20128 Milano - Viale Monza, 198/200 - Tel. +39 02 2552751 - Fax +39 02 2570291
 Internet: www.briziobasi.com - e-Mail: info@briziobasi.com